

# Retro-reflective sensors with polarizing filters, in a robust plastic housing



- DC or AC/DC supply voltage
- Short-circuit protected dual transistor outputs (NPN oder PNP) or relay output with 1 change over contact
- Reverse polarity protection and power-up output suppression
- Light reserve warning indicator
- Test input (option on DC sensors)
- Cable 2 m or connector M12, rotatable
- EMC tested according to IEC 801 and EN 50081-2/EN 50082-2



## Product designation<sup>1)</sup>

Output

Connection

Range adjustment

## Optical data<sup>2)</sup>

Range

Emitter

## Electrical data<sup>2)</sup>

Supply voltage  $U_s$

Allowable ripple

Current consumption (without load)

Max. load current  $I_L$

Residual voltage

Max. switching frequency

## Environmental data

Sealing

Temperature  $T_A$   
(operating and storage)

Weight

OGP 1NA 100 R1	OGP 1NA 400 R1	OGP 1PA 100 R1	OGP 1PA 400 R1	OGP 7HW 100 R1
NPN (light- and dark-on)		PNP (light- and dark-on)		Relay (light-on)
Cable 2 m	Connector M12	Cable 2 m	Connector M12	Cable 2 m
Yes				
0,2...9 m (retroreflector OZR 001)				
Visible-red LED, 660 nm, pulsed, with polarizing filter				
10...30 VDC				24...240 VAC/DC
+/- 10% of $U_s$				
< 15 mA				< 2 VA
200 mA				2 A
< 1,6 V				
1000 Hz				25 Hz
IP 67				
-25...+65 °C				
ca. 140 g	ca. 100 g	ca. 140 g	ca. 100 g	ca. 200 g

## Option<sup>1)</sup>

Test input: emitter on

emitter off

+ $U_s$ or open	
< 1 V	< $U_s$ - 8 V

1) For product designation of sensors with options see designation code on page 93.

2) When not otherwise noted, all technical data at  $T_A = 25$  °C and  $U_s = 24$  VDC or  $U_s = 220$  VAC, respectively.


Retro-reflector ●	Range	Retro-reflector ■	Range	Retro-reflective tape	Range
OZR 001	0.20 – 9 m	OZR 101	0.10 – 15 m	OZR 201	0 m
OZR 002	0.15 – 8 m	OZR 102	0.15 – 5 m	OZR 202	0 m
OZR 003	0.20 – 4 m	OZR 103	0.10 – 11 m	OZR 203	0.40 – 4.5 m
		OZR 104	0.10 – 18 m	OZR 204*	0.40 – 3.9 m
				OZR 205*	0.40 – 5.4 m

\* 30 cm long

24...240 VAC/DC 10...30 VDC


Relay  
1 CO contact

NPN / PNP  
light-on and  
dark-on output




OGP

Dimensions (68,5 mm x 67 mm x 30 mm)

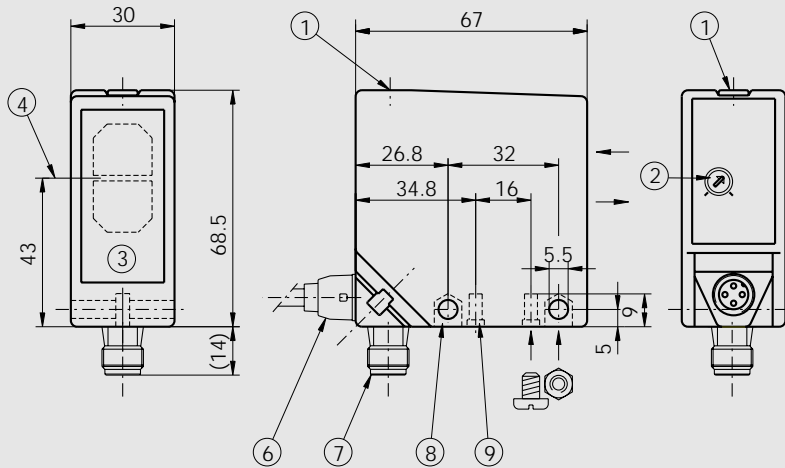


- ① Function indicator
- ② Range adjustment
- ③ Glass covered optics
- ④ Center of the optical axis
- ⑥ Cable connection
- ⑦ Connector M12
- ⑧ Opening for M5 nut
- ⑨ Bore for 5 mm self-tapping screw

Optical diagrams

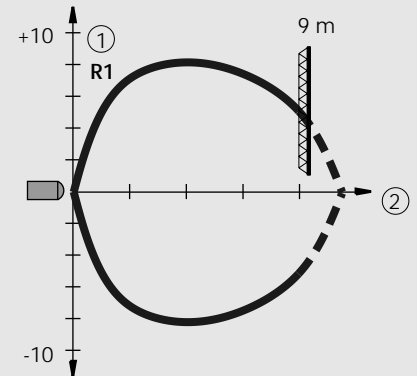

Typical beam diameter  
(with retroreflector OZR 001)

- ① Diameter in (cm)
- ② Range in (m)

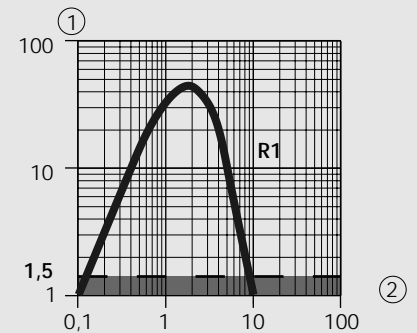

Typical excess gain curve  
(with retroreflector OZR 001)


- ① Gain factor
- ② Range in (m)

Wiring diagram

DC version


NPN output

PNP output

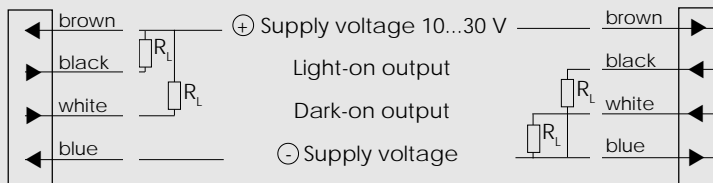

Connection for connector M12	Wire color	Connection for test input	
1	brown	Supply+	Light-on output: Output energized when no object is present.
2	white	Test input	
3	blue	Supply -	Dark-on output: Output energized when object is present.
4	black	Output	

AC/DC version



No protective isolation!