



## SGR Interface Relays 282 T/662T

with integrated pushbutton and socket with screw terminals

„Protective separation according to VDE 0106“  
between coil and contacts


### Accessories

Modules  
on request

### Type of relays

Type of relays	Coupling Relay SGR 282T	Coupling Relay SGR 662T
Relay	SGR 282T	SGR 662T
Socket with screw terminals	ZGF 107	ZGF 107
Retaining clip	ZGF 110	ZGF 110

### Dimensions drawing (mm)

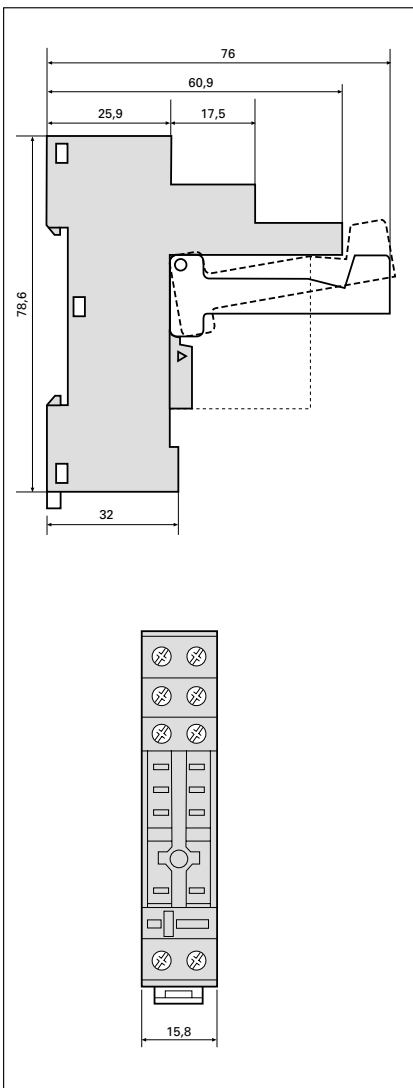


### General data

No. of contacts	2 WK resp. 1 WK
Rated switching capacity	250 VAC 8/16 A 2000/4000 VA
Switching voltage	250 VAC
Nominal voltage of coil	6-12-24-48-60-110 VDC
Manual actuation	integrated pushbutton
Max. wire section	2 x 2,5 mm <sup>2</sup> compact wire 2 x 1,5 mm <sup>2</sup> with cable end
Mounting	DIN rail 35 mm, EN 50022, central screw 1 x M3
Test voltage	4.000 V <sub>eff</sub>
Creeping resistance	CTI 250
Weight	approx. 65 g
Mounting position	any
Ambient temperature	-25°C - +70°C
Terminals numbering	DIN EN 50011
Protection category	IP 20

### Diagrams

View from above

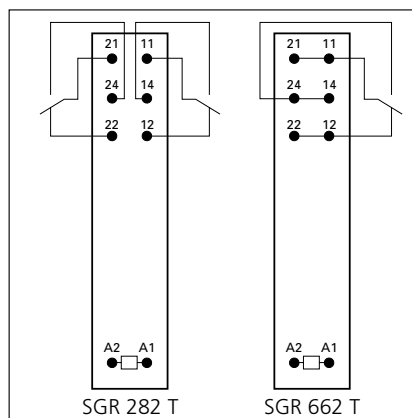

Using DC modules + must be connected to A1!