




SGR xx2 – PCB mounting socket and accessories

Accessories

ZGR 014
Retaining clip

Dimensions drawing (mm)

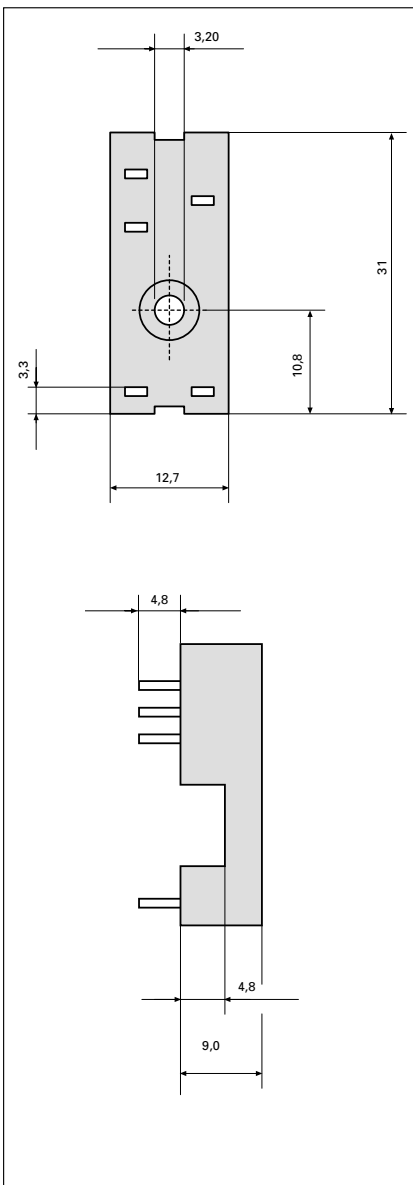

Type of sockets

	ZGR 001	ZGR 002	ZGR 003
Fits to relay	SGR 282, 242, 222 SGR 562, 542, 522 SGR 662, 642, 622	SGR 362, 342, 322 SGR 762	SGR 462, 442, 422
Pin layout	5,0 mm	2,5 mm	3,5 mm

General data

Nominal data	300 VAC 12 A
Test voltage	> 5.000 V _{eff}
Contact springs material	CuSn6 tin plated
Mounting	solder pin
Creeping resistance	CTI 250
Weight	approx. 7 g
Mounting position	any
Ambient temperature	-40°C - +85°C
No. of pins	ZGR 001 8pin ZGR 002 5pin ZGR 003 5pin
Protection category	IP 30

Tests, regulations

Approvals	UL, CSA
Insulation group	VDE 0110 / group C 250 VAC

Drilling patterns (mm)

View from solder side

