


COIL DATA (at 20°C)

| Nominal Voltage (VDC) | Coil Resistance (Ω) \pm 10% | Power Consumption (W) | Pull-in Voltage (VDC) | Drop-out Voltage (VDC) | Max.Allowable Voltage (VDC) |
|-----------------------|--|-----------------------|-----------------------|------------------------|-----------------------------|
| 5 | 70 | 0.36 | 75%Max. | 5%Min. | 130% of nominal Voltage |
| 6 | 100 | | | | |
| 9 | 225 | | | | |
| 12 | 400 | | | | |
| 24 | 1600 | | | | |
| 48 | 6400 | | | | |


DIMENSIONS

Unit: mm





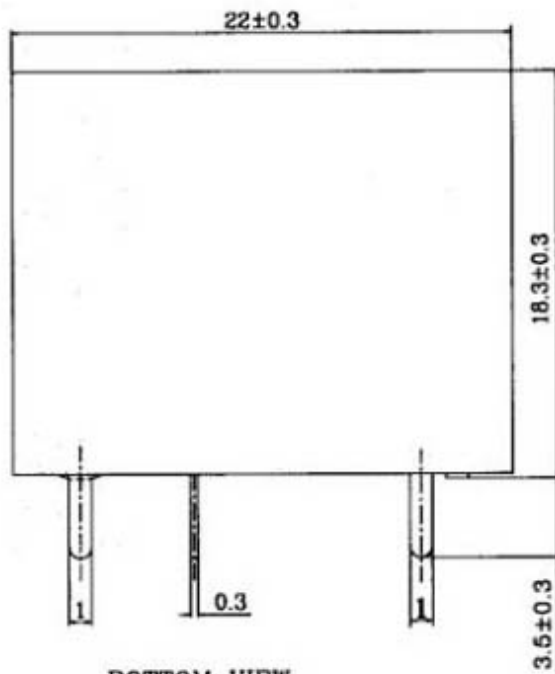

BOTTOM VIEW

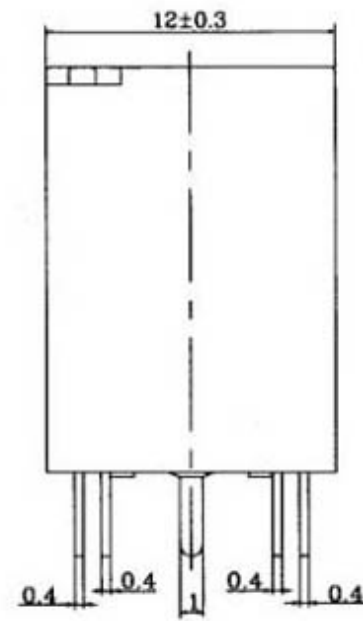

BOTTOM VIEW

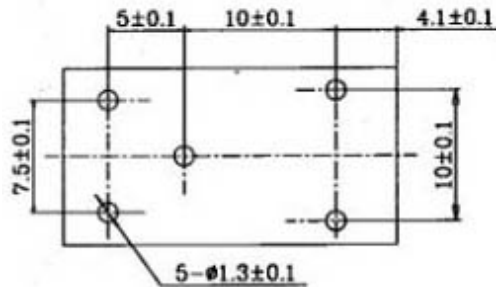

Quality policy:

Today's quality is our future market;
Vendors'satisfaction is our pursuing goal.

Environment policy:

Keeping the system,Abiding by laws;
Innovation in technology,Precaution in pollutions;
Propaganda & education,Continual improvement.

WENZHOU WZNJIA RELAY CO.,LTD
ADD: YONGJIANG ROAD ,WENZHOU ECON. & TECH.
DEVLOPPEMT ZONE,WENZHOU,P.R.CHINA
POST CODE:325011
TEL: 86-577-86554286,86531158
FAX: 86-577-86554288
E-mail: wzwj@mail.wzptt.zj.cn